
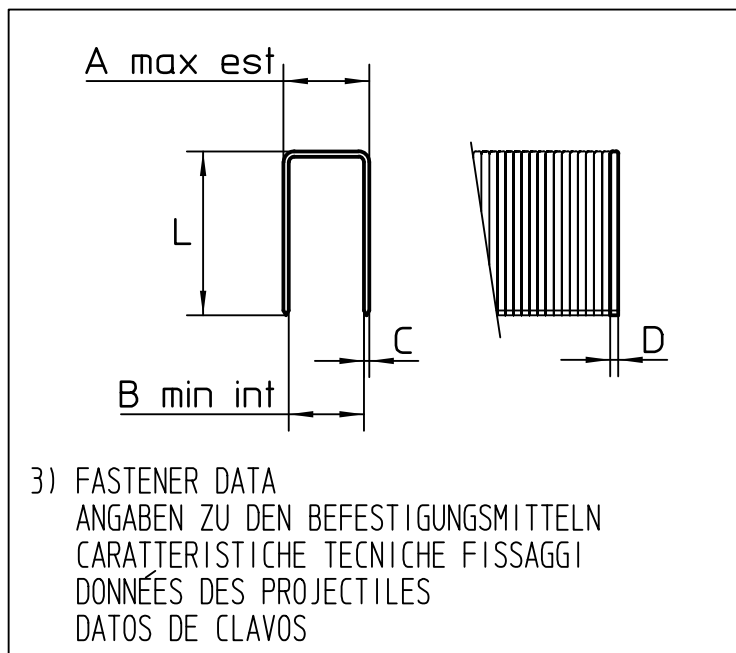


1) TOOL TYPE - GERAETETYP - DESCRIZIONE MACCHINA - TYPE D'OUTIL - TIPO DE MAQUINA  
 cod. 11109 - 21109 - 31109 21P 90-25 A

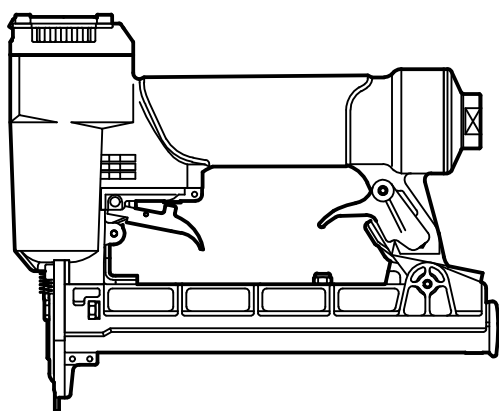

2) TOOL CHARACTERISTICS  
 SPEZIFICATION DES GERAETES  
 CARATTERISTICHE TECNICHE  
 CARACTÉRISTIQUES DE L'OUTIL  
 CARACTERÍSTICAS DE LA MAQUINA

|  |  |  |  |
|--|--|--|--|
| HEIGHT<br>HOEHE<br>ALTEZZA<br>HAUTEUR<br>ALTURA  | WIDTH<br>BREITE<br>LARGHEZZA<br>LARGEUR<br>ANCHURA | LENGTH<br>LAENGE<br>LUNGHEZZA<br>LONGUEUR<br>LONGITUD                            | WEIGHT<br>GEWICHT<br>PESO<br>POIDS<br>PESO |
| in.7.16<br>mm.182  | in.1.93<br>mm.49                                   | in.8.90<br>mm.226  | lbs.2.25<br>kg.1.020                       |
| MIN-MAX WORKING PRESSURE<br>MIN-MAX ARBEITSDRUCK<br>MIN-MAX PRESSIONE DI ESERCIZIO<br>MIN-MAX PRESSION DE TRAVAIL<br>MIN-MAX PRESSION DE TRABAJO   |  | 60 / 100 PSIG<br>4 / 7 BAR   |  |
| AIR CONSUMPTION PER SHOT<br>LUFTVERBRAUCH PRO NAGELUNG<br>CONSUMO ARIA PER COLPO<br>CONSUMATION DE L'AIRE PAR COUP<br>CONSUMO DE AIRE CADA DISPARO |  | PERFORMANCES AT 90 psi (0.62 MPa)<br>PRESTAZIONI A 6.2 bar (0.62 MPa)<br>0.36 l. |  |
| LUBRICANT<br>SCHMIEROEL<br>LUBRIFICANTE<br>LUBRIFIANT<br>LUBRIFICANTE  |  | BP ENERGREASE LT2<br>BP ENERGOL HP10   |  |

3) FASTENER DATA  
 ANGABEN ZU DEN BEFESTIGUNGSMITTELN  
 CARATTERISTICHE TECNICHE FISSAGGI  
 DONNÉES DES PROJECTILES  
 DATOS DE CLAVOS

|   |           |                                      |
|---|-----------|--------------------------------------|
| A) OUTSIDE CROWN<br>AUSSEN RUECKEN<br>LARGHEZZA EST.<br>CORONNE EXT.<br>CORONA EXT.                         | } MAX     | in. 0.224<br>mm. 5.70                |
| B) INSIDE CROWN<br>INNEN RUECKEN<br>LARGHEZZA INT.<br>CORONNE INT.<br>CORONA INT.                           |           | } MIN                                |
| CxD) WIRE<br>DRAHT<br>FILO<br>FIL<br>ALAMBRE  |           | in. 0.039 x 0.049<br>mm. 1.00 x 1.25 |
| L) LENGTH<br>LAENGE<br>LUNGHEZZA<br>LONGUEUR<br>LONGITUD  | } MIN-MAX | in. 3/4" - 1 9/16"<br>mm. 12 - 25    |
| MAGAZINE CAPACITY<br>MAGAZIN CAPAZITAET<br>CAPACITA' CARICATORE<br>CAPACITE' CHARGEUR<br>CAPACIDAD CARGADOR |           | 110 staples                          |

|  |                 |
|--|-----------------|
| * ACTUATION SYSTEM<br>* AUSLOESEART<br>* ATTUAZIONE<br>* MISE EN OEUVRE<br>* ACTUACIÓN | 4 (SAFETY : CT) |
|--|-----------------|

|               |   |
|---------------|---|
| * LOADING     | <input checked="" type="radio"/> BOTTOM LOADING |
| * LADEN       | <input type="radio"/> SIDE LOADING              |
| * CARICAMENTO | <input type="radio"/> TOP LOADING               |
| * CHARGER     | <input type="radio"/> COIL                      |
| * CARGA       | <input type="radio"/> OTHER                     |

\* SEE INSTRUCTION MANUAL - SIEHE BETRIEBSANLEITUNG - VEDI MANUALE - VOIR MODE D'EMPLOI - VER EL MANUAL

|  |                                      |  |
|--|--------------------------------------|--|
| NOISE CHARACTERISTICS<br>GERÄUSCH - EMISSION DATEN<br>CARATTERISTICHE RUMOROSITA'<br>CARACTÉRISTIQUES ACOUSTIQUE<br>CARACTERÍSTICAS DE RUIDO | EN 792-13<br>EN 12549<br>EN ISO 4871 | $L_{WA,1s}$ : 97.20 dB(A) - $K_{WA,1s}$ , 2.5<br>$L_{pA,1s}$ : 90.70 dB(A) - $K_{pA,1s}$ , 2.5 |
|--|--------------------------------------|--|

|  |            |   |                    |
|--|------------|---|--------------------|
| VIBRATION VALUE<br>VIBRATIONSWERT<br>VALORE DI VIBRAZIONE<br>VALEUR DE VIBRATION<br>VALOR DE VIBRACIÓN | } ISO 8662 | IS BELOW THE DECLARATION LIMIT SET BY<br>LIEGT UNTER DEM ANZUGEBENEN WERT GEMÄSS<br>RISULTA AL DI SOTTO DEL LIMITE DA DICHI. STABILITO IN<br>RESULTE AU DESSOUS DE LA LIMITE A DECLARER ETABLIE PAR<br>RESULTA SER DEBAJO DEL LIMITE A DECLARAR | } EN 292<br>1ADD.A |
|--|------------|---|--------------------|